



OneVue Sync Transmitter

The OneVue Sync Transmitter unifies timekeeping and critical notifications on the Primex OneVue Platform, using a high-penetration frequency to talk to devices throughout a building or campus. (Broadcast at 72Mhz/FCC-licensed frequency).

OneVue Transmitters can be configured with different power output levels, allowing coverage to scale from a single building to an entire campus.

ONEVUE

- OneVue streamlines administration by combining functions in one connected service: clock synchronization, class bells, reports, and system monitoring.
- OneVue simplifies facility management.

SAFE, SIMPLE, COMPATIBLE

- Efficiently sends time synchronization signals through commercial building materials to ensure all devices receive important time updates, even for daylight saving time, and after a power outage.
- Backwards-compatible with your Primex clocks; syncs with or without OneVue; integrates with notification systems such as Public Address.
- Daylight saving time and time zone controlled through Bluetooth app or OneVue control panel.

1-WATT TRANSMITTERS

Appropriate for a single building, these transmitters are configurable with an internal antenna, or with an external roof-mounted antenna to expand coverage.

1-WATT TRANSMITTERS		
Part Number	Power	Antenna Type
TX4001IM	1 Watt	Internal
TX4001EM	1 Watt	External
TX4001NR	1 Watt	Repeater



1-Watt Transmitter

5-WATT AND 30-WATT TRANSMITTERS

Campus-wide deployments are facilitated with the OneVue Transmitter 5-watt or 30-watt models, which include an external roof-mounted antenna, and require installation by a Primex Certified Installer.

5-WATT AND 30-WATT TRANSMITTERS		
Part Number	Power	Antenna Type
TX4005EM	5 Watts	External
TX40030EM	30 Watts	External



5- or 30-Watt Transmitter



1-WATT TRANSMITTER SPECIFICATIONS:


- 1-Watt maximum transmission (at transmitter)
- 72 MHz frequency range
- 49 channels available (pre-programmed prior to shipping)
- Daylight saving time and time zone controlled through Bluetooth app or Cloud control panel
- Dimensions: 17.0"L x 12.0"W x 1.7"D (43.2cm x 30.5cm x 4.32cm)
- Power Supply:
 - Input: 120 VAC, 50/60 Hz, 0.6 Amp
 - Output: 9 VDC, 2.78 Amp (6 ft. cord, 1.83m)
- Operating Range: 32°- 122°F (0° - 50°C)

Transmitter with Internal Antenna (refer to Figure 1)

- Antenna: 46.0" Long (116.8cm)
- Weight: 7.75 lbs. (3.5kg)

Transmitter with External Antenna

- Cabling: 100' (30.48m) between transmitter and antenna provided
- FCC Part 90 Accepted
- IC RSS-119 Accepted
- Weight: 9 lbs. (4.1kg)

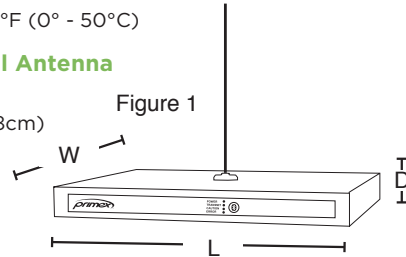


Repeater (TX4001NR)

- Requires installation of a Master Transmitter in order to receive and transmit the GPS time signal
- Antenna: 46.0" Long (116.8cm)
- Weight: 7.75 lbs. (3.5kg)



Outdoor Ground Plane Antenna

- For use with TX4001EM Transmitters
- Dimensions: 29.4"H x 41.5"W (74.7cm x 105.41cm)
- Lightning Protection: Direct Ground
- Cabling: 100' (30.48m) between transmitter and antenna provided
- FCC Part 90 Accepted
- IC RSS-119 Accepted
- Weight: 8.25 lbs. (3.75kg)





5/30-WATT SPECIFICATIONS:

- Operating Frequency Range: 72 MHz
- Enclosure Dimensions: 22"W x 17"H x 22"D (55.88cm x 43.18cm x 55.88cm)
- Approx. Weight: 55 lbs. (24.9kg)
- Power Supply Requirements:
 - 120 VAC, 50/60 Hz, 6.0A Max
- Oversized heat sink provides adequate cooling
- Amplifier Output Bandwidth: >20 MHz maximum
- Connector at Antenna: N-male
- 100' (30.48cm) of cabling between transmitter and antenna



GPS Receiver Specifications:

- Included with Primary Transmitter
- 16' (5m) cable. 50, 100, 150 and 200 foot (15.24m, 30.48m, 45.72m and 60.69m) extensions available
- Mounting bracket and hardware included for rooftop or window installation
- Dimensions: 2.5"W x .75"H (6.35cm x 1.91cm)
- Mounting Bracket: 3.5"W x 1.4"H x 4.5"D (8.89cm x 3.56cm x 11.43cm)
- Weight: 0.75 lb. (.34kg)
- Operating Range: -32°- 158°F (-30° - 70°C)



To Learn More:

Call 262.729.4858

Email: info@primexinc.com

primexinc.com

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Primex, Inc. is under license. Other trademarks and trade names are those of their respective owners.

OneVue is a trademark of Primex. The innovative technology software solution for facility and time synchronization monitoring and reporting. All other trademarks are the property of their respective owners.

©2019 Primex. The Primex logo is a registered trademark of Primex.
All Rights Reserved. 119