



Wireless Synchronized Time

Personal Series LCD Digital Clock

The Personal Series Clock combines the accuracy of GPS or Network Time Protocol synchronized time with contemporary styling desired for patient, dorm and office spaces. The Primex proprietary 72MHz wireless transmission frequency delivers the perfect combination of distance and signal strength to easily penetrate common building materials, and transmit across longer distances with less potential for signal interference to ensure the Personal Series clocks remain synchronized with every other Primex XR Series clock in your facility.

Ideal for Offices, Public Areas and Patient Rooms

The Personal Series LCD clock has been specifically styled to provide the accuracy of synchronized time and date display in the more personal spaces in your facility. Designed to mount securely to the wall or stand on a desktop, the Personal Series clock provides you with another option to deploy synchronized time throughout every room in your facility.

Product Features



- Automatically adjusts for Daylight Saving Time
- Automatic backlight illuminates display in low lighting
- Displays time, date and day of the week
- 12- or 24-hour display models
- Battery operated



LCD CLOCK	
Battery	Description
XRA4Z100	XR Personal Series LCD Clock 12Hr Display
XRA4Z100-24	XR Personal Series LCD Clock 24Hr Display

PERSONAL SERIES LCD CLOCK SPECIFICATIONS:

- Automatically adjusts for Daylight Saving Time
- Backlight switch for Off, Low or High settings
- Requires 4 C-cell alkaline batteries (not included)
- Wall mount with patented anti-theft clock lock, or use integrated easel stand for desk or tabletop
- Overall: 7.5"H x 11.5"W x 1.75"D (19.1cm x 29.2cm x 4.5cm)
- Display Screens:
 - Time - 2.25"H x 5.5"W (5.7cm x 14cm)
 - Calendar - 1.5"H x 5.5"W (3.8cm x 14cm)
- Weight: 1.25 lbs (.57kg)
- Approximately 4 years of battery life under normal conditions
 - Assumes backlight runs eight hours each day on low light setting
- Operating temperature range: 32°-194°F (0°-35°C)
- Storage temperature range: -20°-185°F (-29°-85°C)

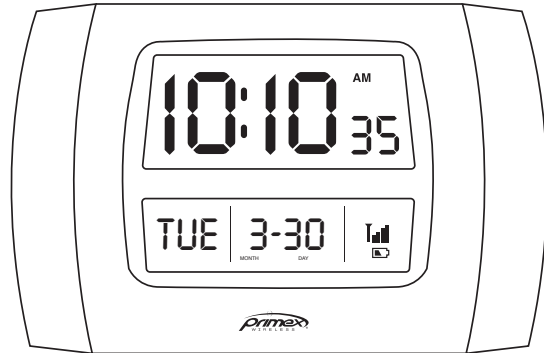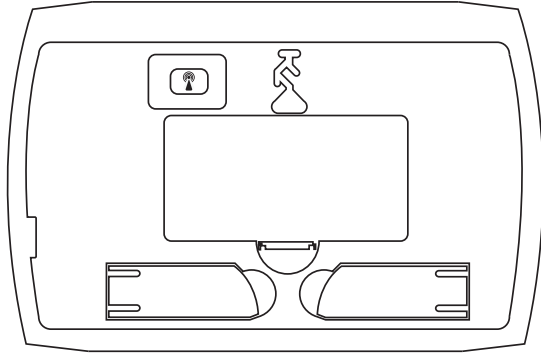

To Learn More:
Call 800.537.0464
Email: info@primexinc.com

primexinc.com